



piek lettura Design: Sebastian David Büscher

IP44.de outside lighting
Mühlenstraße 20 . 33378 Rheda-Wiedenbrück . Germany
T +49 5242 5797-0 . F +49 5242 5797-10
welcome@IP44.de . www.IP44.de

IP44.de behält sich spätere Produktanpassungen auch ohne Ankündigung vor.
IP44.de reserves the right to product adaptations at any time, without prior notice.

Lichttechnik:
230V Power LED
3000K warmweiß
L70/50.000 h

Flood Reflektor symmetrisch

dimmbar

Anschluss:
5 m Zuleitung
(H05RN-F 3G0,75) inkl.
Schutzkontaktstecker
anschlussfertig

ortsveränderlich

Material:
Kopf: Aluminiumguss
pulverbeschichtet
Stab: Edelstahl
pulverbeschichtet
Fuß: Eisenguss
pulverbeschichtet
Klarglas

Schutzart:
IP65

EEK:
A+

light technology:
230V Power LED
3000K warm white
L70/50.000 h

flood reflector symmetric

dimmable


connection:
5 m supply cable
(H05RN-F 3G0,75)
incl. safety plug ready
to connect

movable

material:
head: aluminium die-casting
powder-coated
pole: stainless steel
powder-coated
base: iron casting
powder-coated
clear glass

protection class:
IP65

EEC:
A+

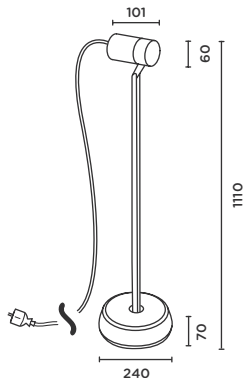

Art.-Nr. item no.	Farbe colour	Systemleistung system performance	Lichtrichtung light direction
92075-AN	anthracite RAL 7016	6 W/310 lm	
92075-CB	cool brown	6 W/310 lm	
92075-BL	deep black RAL 9005	6 W/310 lm	

piek lettura controller

Lichttechnik:
230V Power LED
3000K warmweiß
L70/50.000 h

Flood Reflektor symmetrisch

dimmbar

Anschluss:
5 m Zuleitung
(H05RN-F 3G0,75) inkl.
Controller und Schutzkontakt-
stecker anschlussfertig

ortsveränderlich

Material:
Kopf: Aluminiumguss
pulverbeschichtet
Stab: Edelstahl
pulverbeschichtet
Fuß: Eisenguss
pulverbeschichtet
Klarglas

Schutzart:
IP65

EEK:
A+

light technology:
230V Power LED
3000K warm white
L70/50.000 h

flood reflector symmetric

dimmable


connection:
5 m supply cable
(H05RN-F 3G0,75) incl. IP44.de
controller and safety plug ready
to connect

movable

material:
head: aluminium die-casting powder-
coated
pole: stainless steel
powder-coated
base: iron casting
powder-coated
clear glass

protection class:
IP65

EEC:
A+

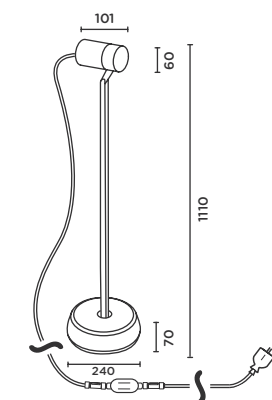

Größe in mm
size in mm

Art.-Nr. item no.	Farbe colour	Systemleistung system performance	Lichtrichtung light direction
92075-AN-CONT	anthracite RAL 7016	6 W/310 lm	
92075-CB-CONT	cool brown	6 W/310 lm	
92075-BL-CONT	deep black RAL 9005	6 W/310 lm	

+ Optional mit piek cover.
with piek cover as an option.