


como

instructions for use

1. Detach set screws from the light housing and remove the wall bracket.
2. Conduct mains cable through cable entry point of the wall bracket. Conduct aperture in cable entry point in such a way that density is assured.
3. Attach wall bracket. Pay attention of position "top".
Use the washer gaskets with rubberized face showing to the wall bracket. At mounting holes which are not used arrange for density.
4. Hustle silicone-tubes over the power lines.
5. Establish protective conductor connection and conduct electrical junction.
6. Attach light housing onto the wall bracket. Fasten light housing with lateral set screws.

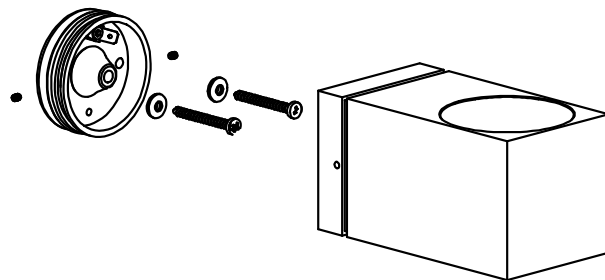

light technology:

IvyLight-technology
230V Power LED / 3000K
16 W/1390 lm

 EEC

technical information:

operating voltage 230V / 50Hz

 protection class

 safety class 1

 Luminaire is suitable for mounting on normal inflammable fixing surfaces.

 conformity mark

maintenance:

Disconnect the electrical installation.

Check gaskets and clean or replace them if necessary.

This luminaire contains built-in LED lamps. The lamps cannot be replaced in the luminaire.

dimming:

The luminaire can be dimmed with an approved leading-or trailing edge dimmer. Please contact IP44.de service center for a list of approved dimmers.

care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning.

Please note care instructions at www.IP44.de.

See service documents:

Care of anodized aluminium or coated surfaces.

safety:

We point out that the electric connection of light fixtures has to be done by a certified installer.

We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire.

Modifications on the luminaire will result in loss of warranty.

Please keep the instructions with the service documents!