


## piek lettura + piek lettura controller

### instructions for use

#### For unpaved beds and greens

1. Position the base of the luminaire at the desired place.
2. Stick the pole of the luminaire into the cone of the luminaire base and adjust it in the desired position.
3. Provide the electrical connection between connect plug and connect socket **aboveground**.
4. Optionally fix mains cable in the luminaire pole.
5. Grounded electrical sockets have to correspond to the essential protection class.
6. The safety plug signals the movability of the luminaire.
7. Please note, that a fixed installation and/or a connection with an earth-joint is not permitted.

piek lettura controller\*

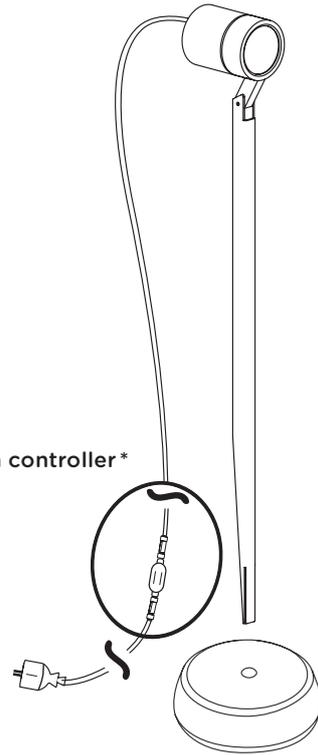

#### piek lettura controller (\*) – additional informationen:

Please see the configuration of the controller from the enclosed Short User Guide to the Casambi-App. With questions concerning the App, please directly contact the company Casambi via [support@casambi.com](mailto:support@casambi.com).

#### requirements for installation:

Max. output power: 150 W  
In- and output voltage: 230 V.  
Transmission range 30 m (free area).

#### light technology:

230V Power LED / 3000K  
system performance: 6 W/310 lm

 EEC

#### technical information:

operating voltage 230V / 50Hz  
supply cable H05RN-F 3G0,75

 protection class

 safety class 1

 Luminaire is suitable for mounting on normal inflammable fixing surfaces.

 conformity mark

#### maintenance:

Disconnect the electrical installation.

This luminaire contains built-in LED lamps. The LED lamps can be replaced by IP44.de in case of a failure of the LED. In this case, please get in touch with your retailer.

#### dimming:

The piek lettura can be dimmed with an approved leading- or trailing edge dimmer. Please contact IP44.de service center for a list of approved dimmers.

The piek lettura controller will be dimmed by the included IP44.de controller.

#### care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning. Please note care instructions at [www.IP44.de](http://www.IP44.de).

#### safety:

We point out that the electric connection of light fixtures has to be done by a certified installer. We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire. Modifications on the luminaire will result in loss of warranty.

#### assembly instruction:

The luminaire may not come into contact with highly acidic or alkaline soils, or with other aggressive substances, chemicals or fertilizers.